



NAE WOI KOREA




NWK 99 OPP Accessories Manual








You will need four 30-40cm chairs or ladders to work
(Aluminium X, wood, plastic O)

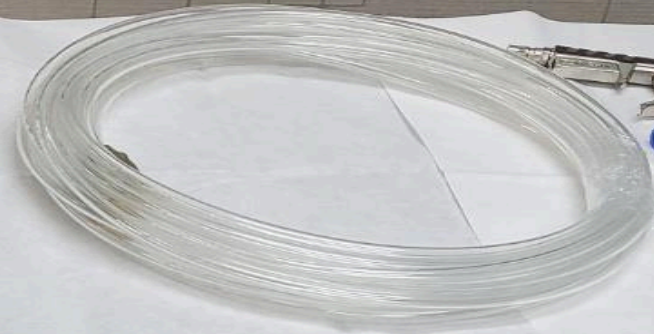

NWK 99 OPP Accessory

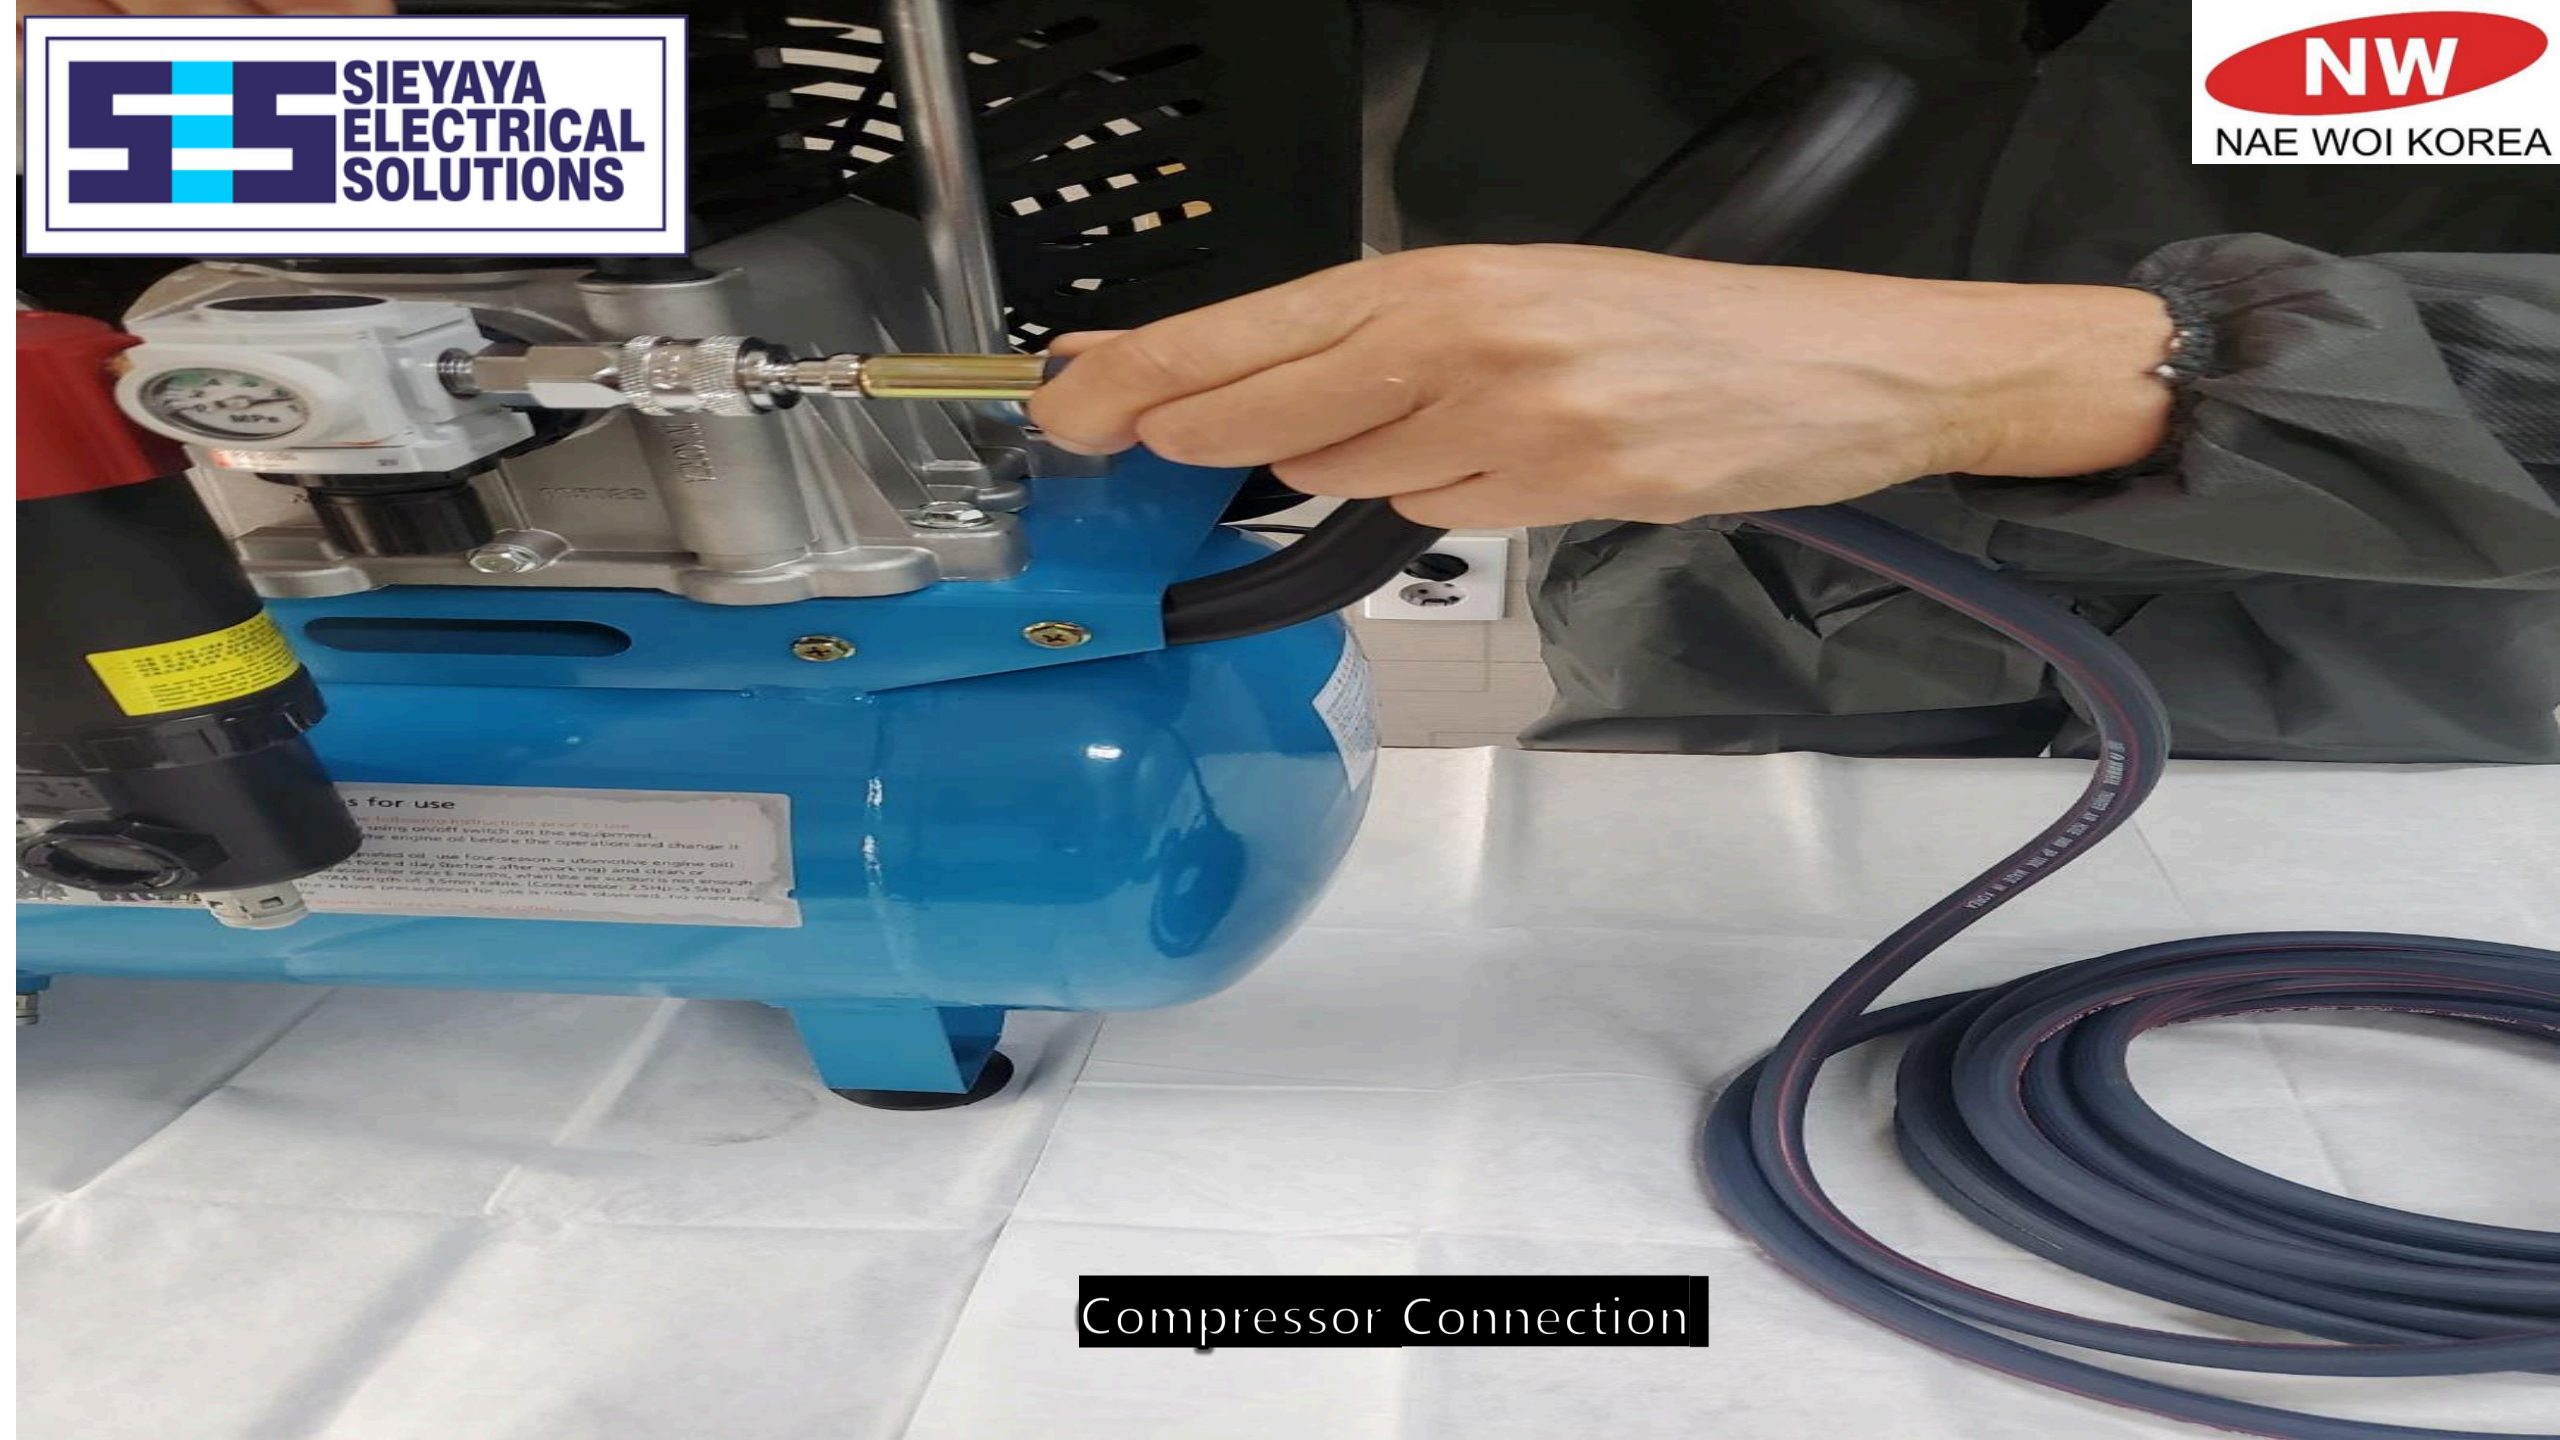

Compressor Connection



Y-valve Connection

Y-valve connected to Compressor







Sprayer Connection



NWK99 OPP liquid Tube connection with Sprayer




Air Blowing Connection

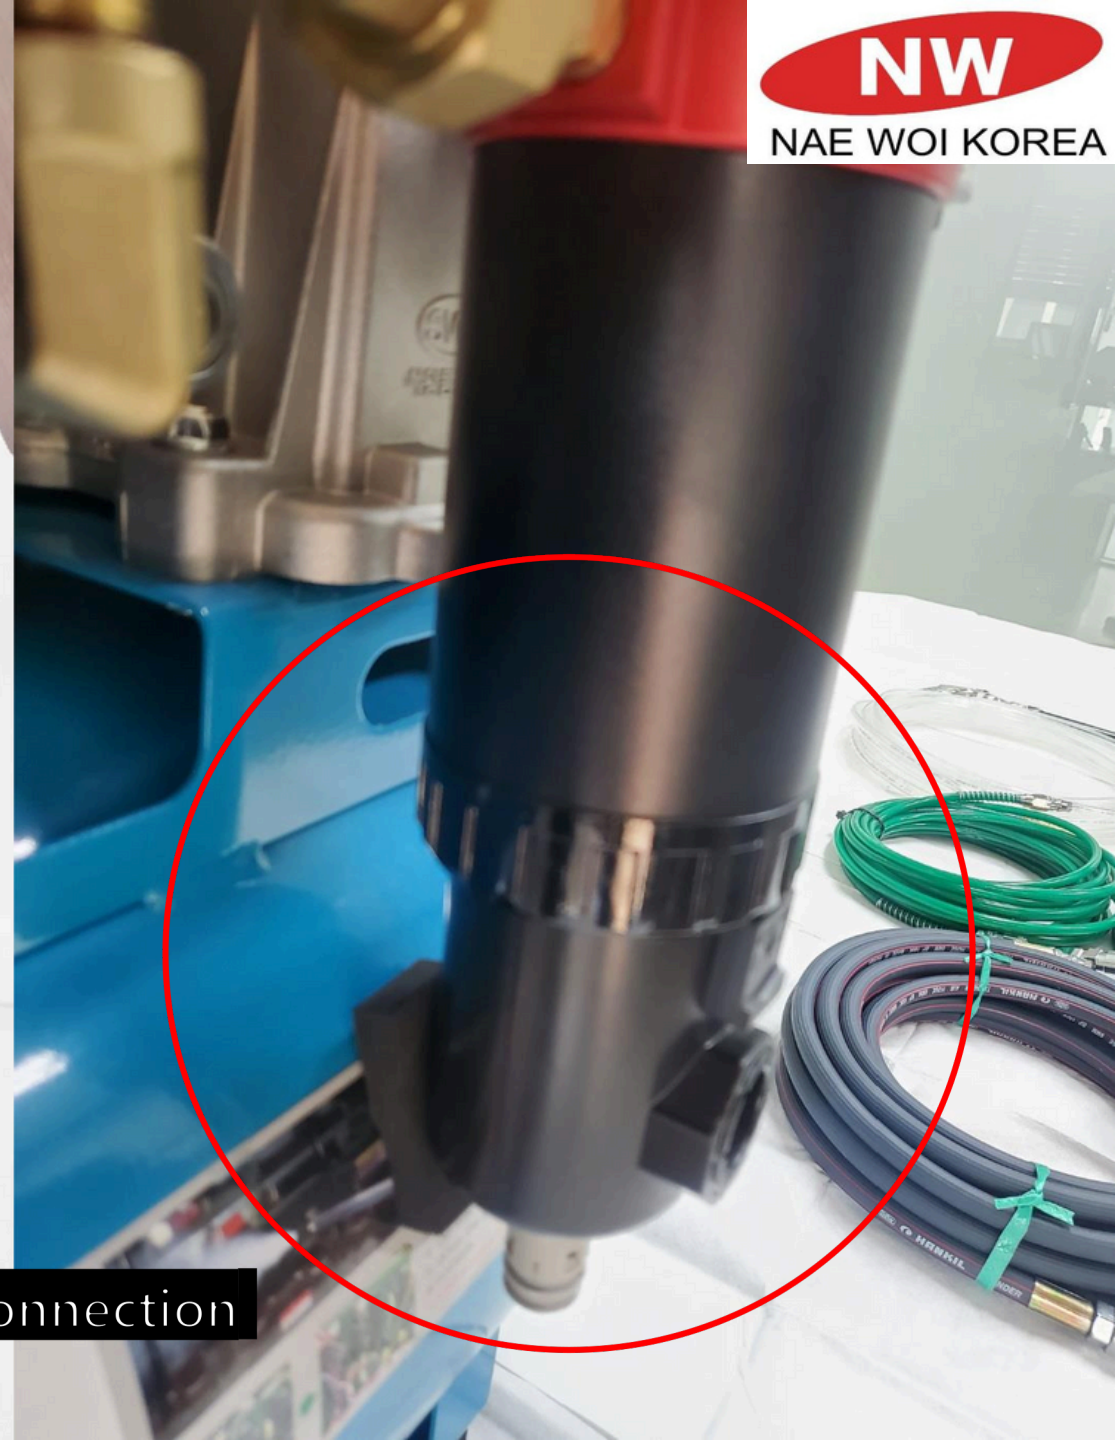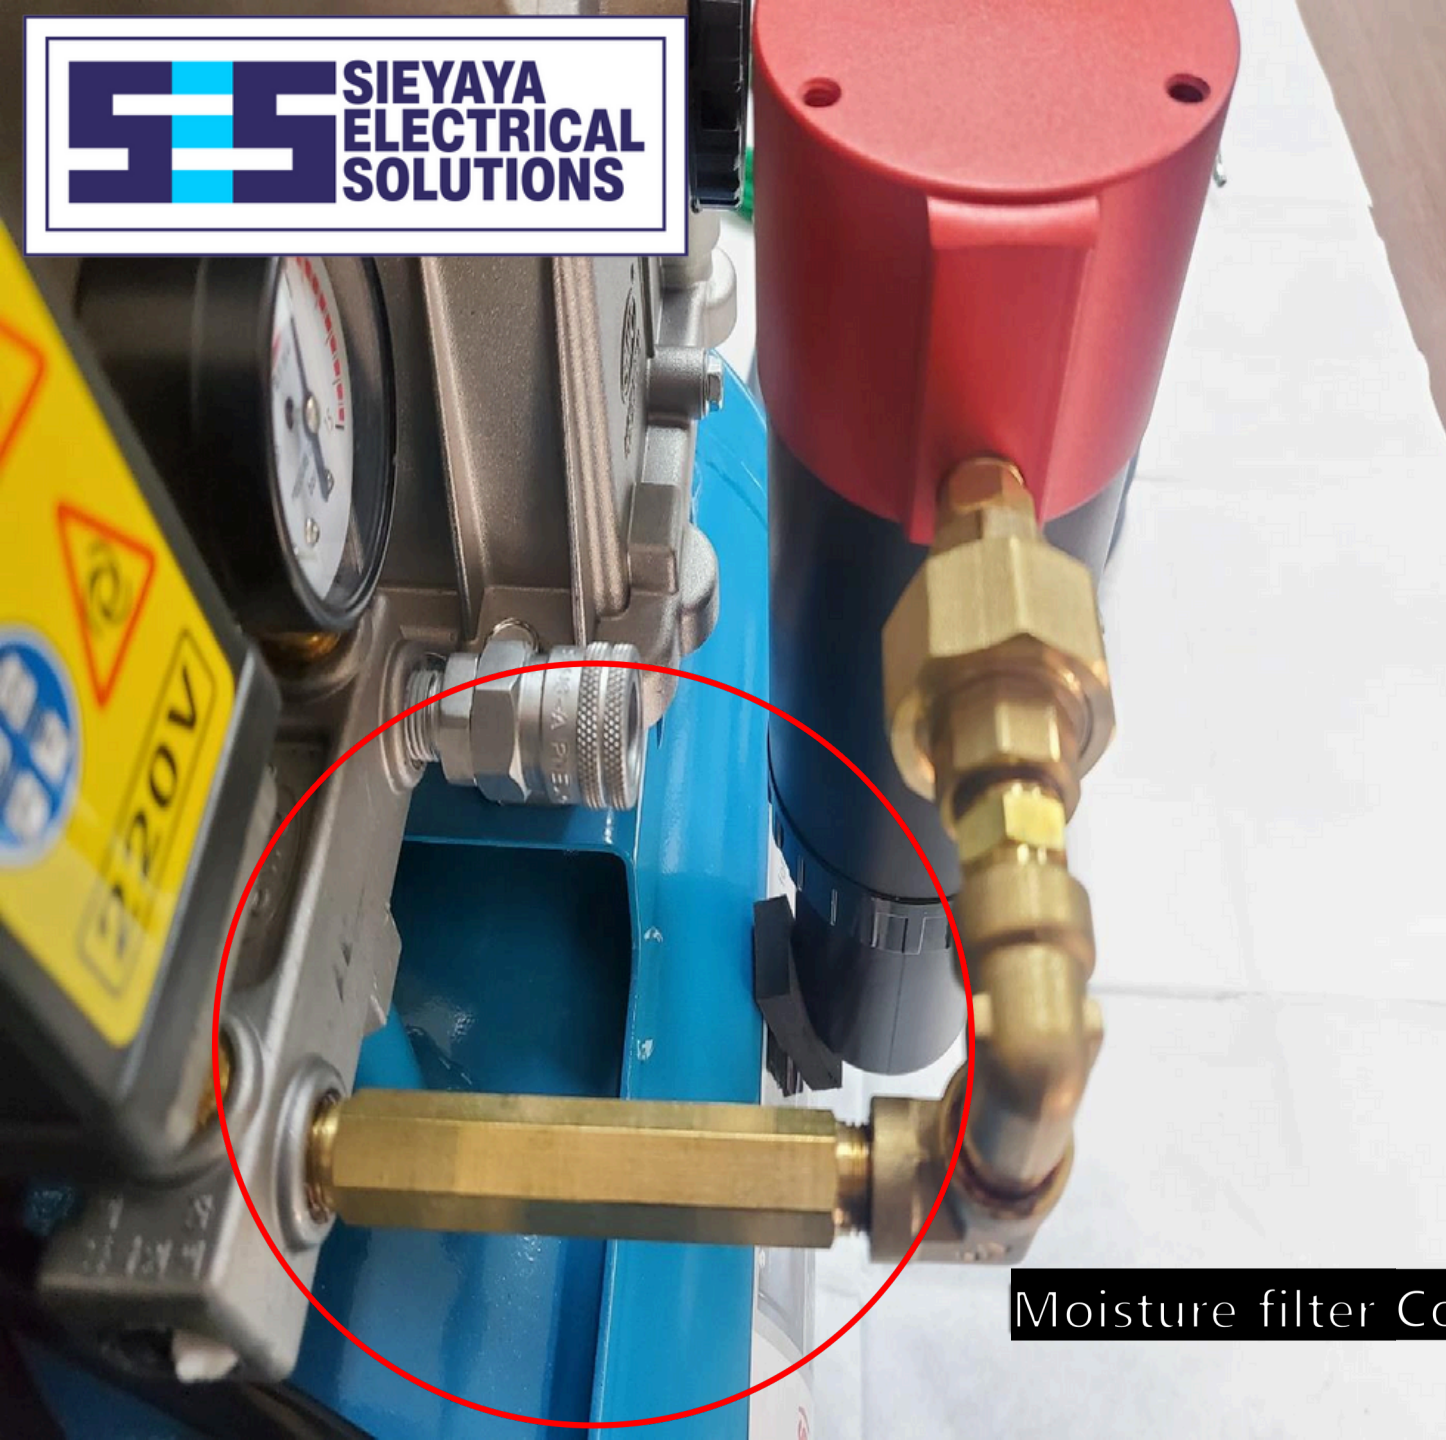

Moisture filter Connection

Moisture filter Connection



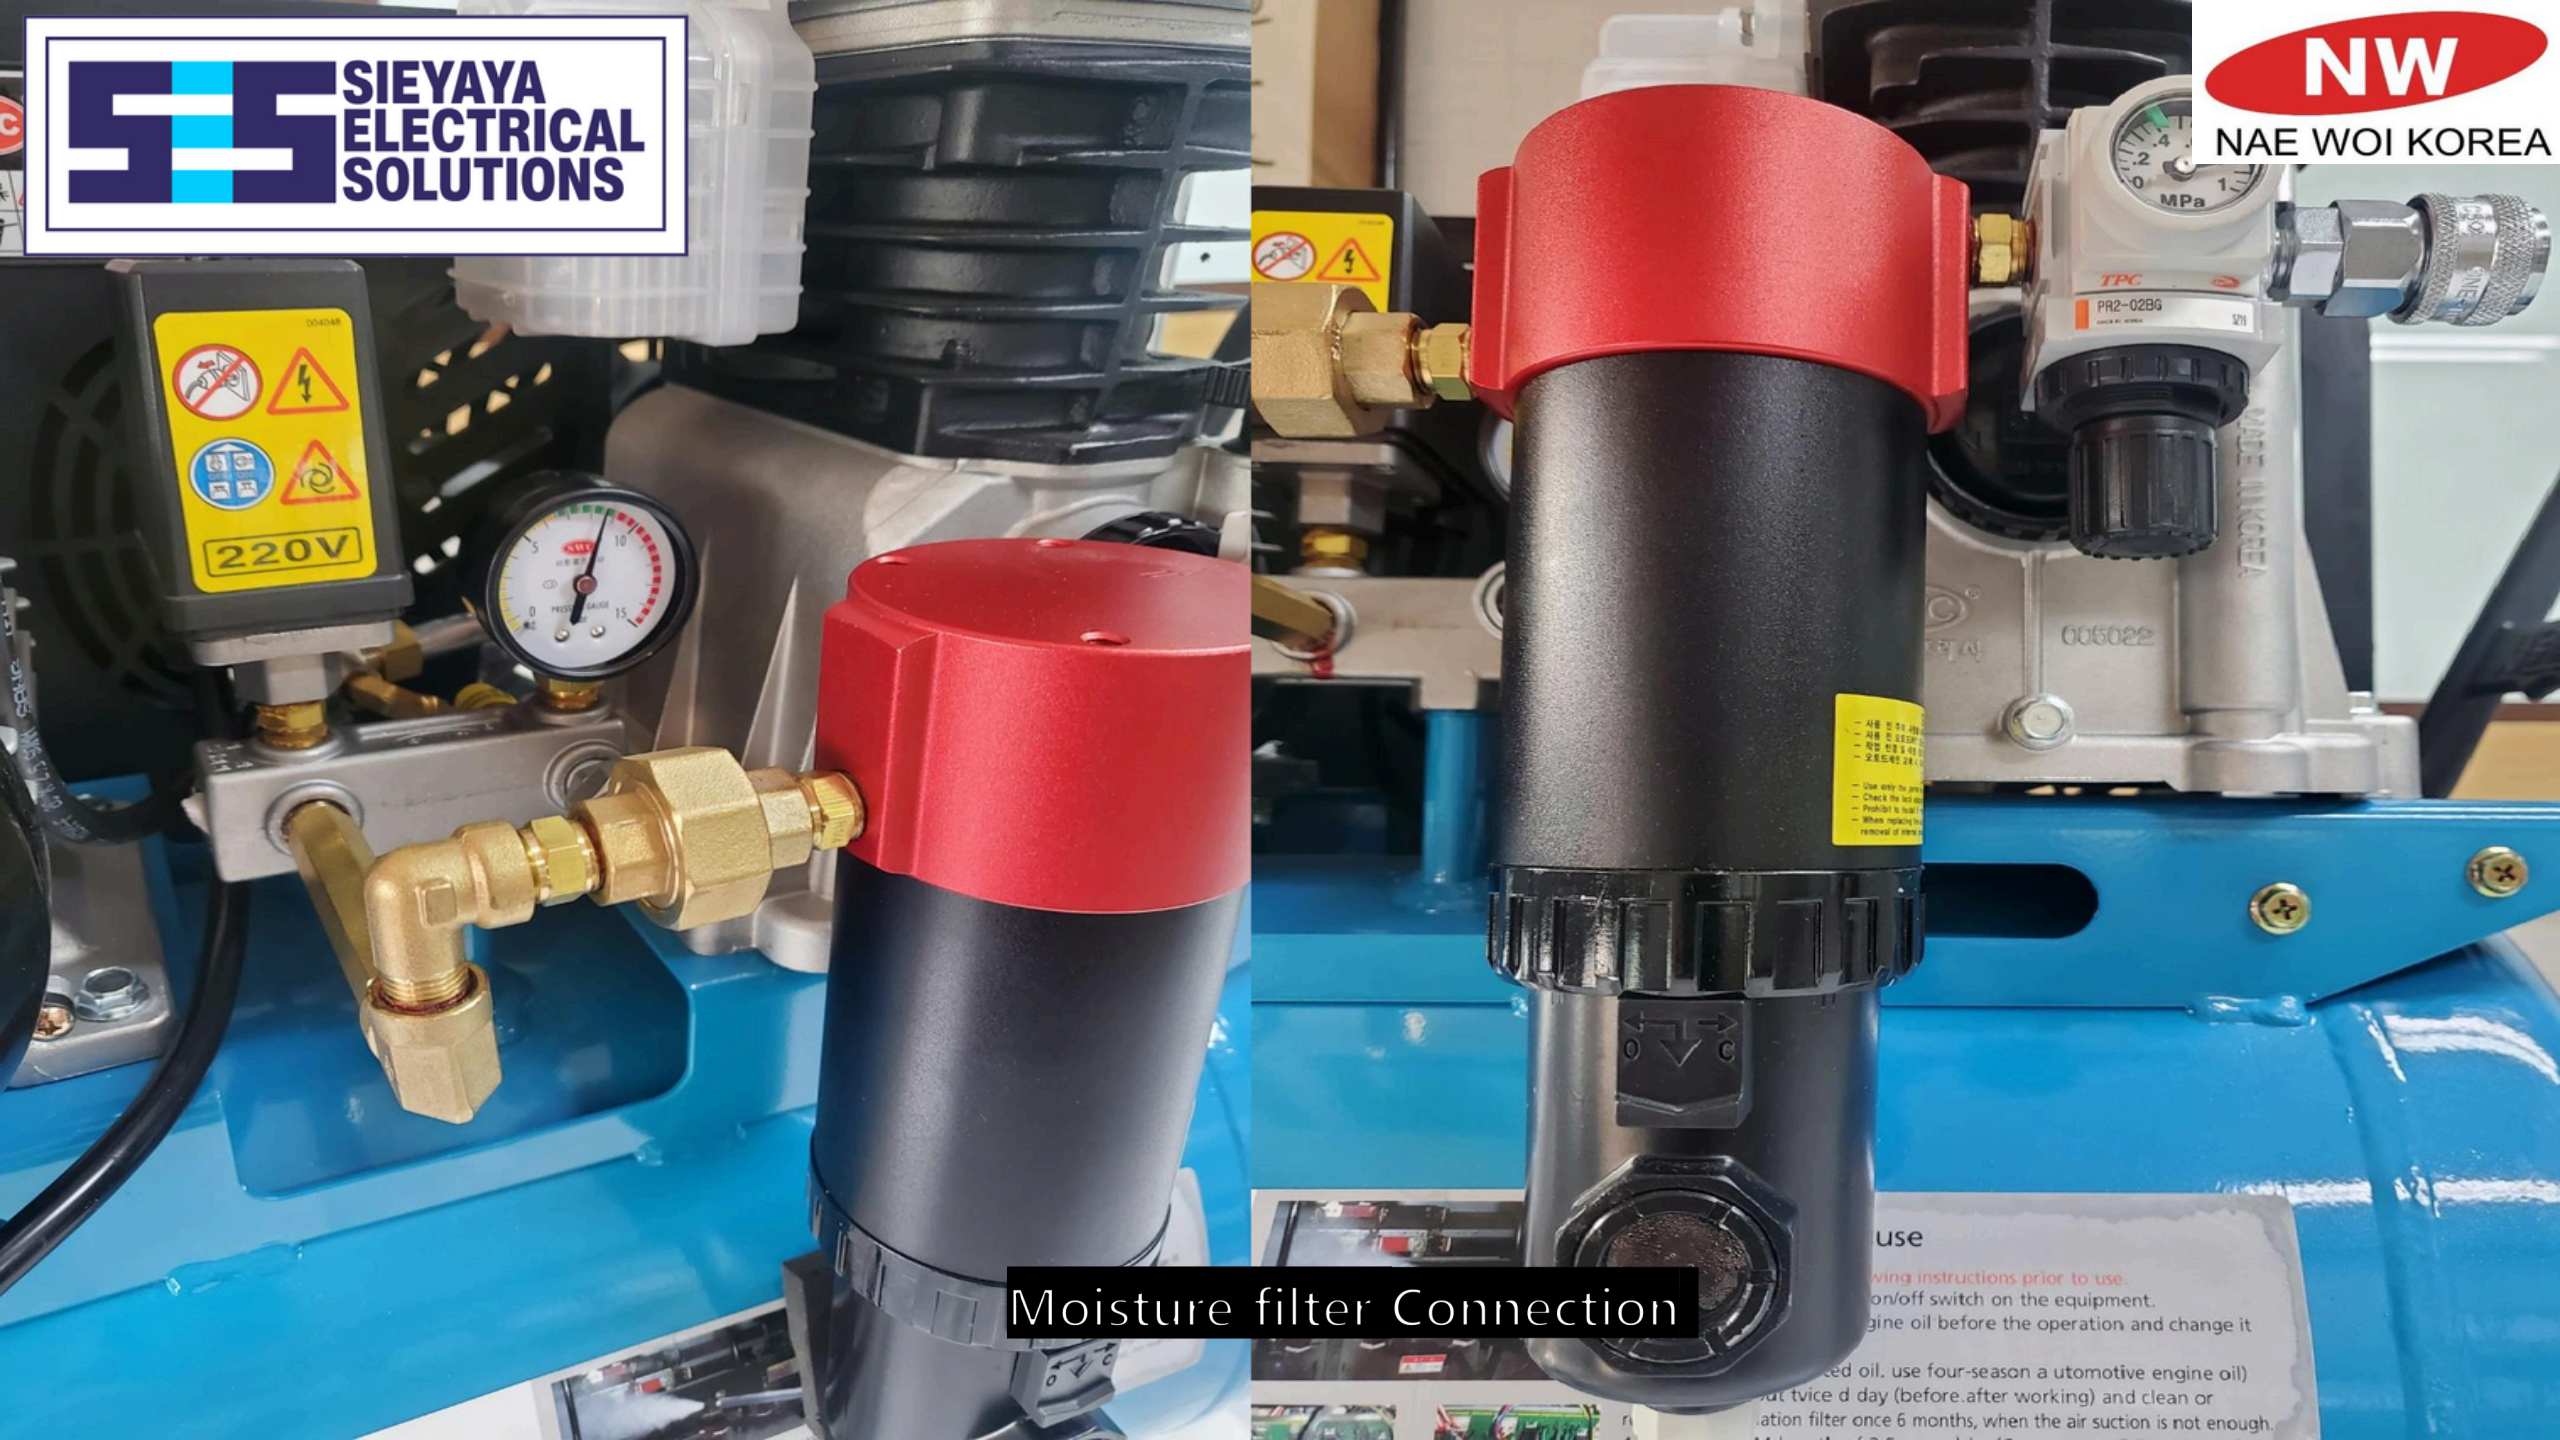

Moisture filter Connection

Use

Following instructions prior to use.
on/off switch on the equipment.
engine oil before the operation and change it

ected oil, use four-season a utomotive engine oil)
ut twice d day (before,after working) and clean or
ation filter once 6 months, when the air suction is not enough.



Moisture filter Connection



Checking the pressure of the Moisture filter